Document Version 1.0 | Dec. 2023





White



Black



Silve

OPTIMUS Program

Bench application

More Options. More OPTIMUS.

DESCRIPTION

Think bigger. Powered by efficient DC Control Box technology, the OPTIMUS Bench Frame offers endless flexibility for larger desks. Plug and play modularity means that all you need to do is make it your own. Choose the columns, feet and handset you need... and enjoy the benefits of the OPTIMUS Program as standard!


FEATURES


- Unique sheet metal design
- Clean and slim design
- Optimized cable management
- Electric screwdriver ready
- Overall Modularity
- Plug & Play technology
- Simple & fast set up
- Bulk & eCommerce designed packaging
- Made in EU


Contact Headquarters
LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America
LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,
Cedar Springs, MI 49319, USA, office.na@logicdata.net

LOGICDATA
MOTION FOR YOUR LIFE

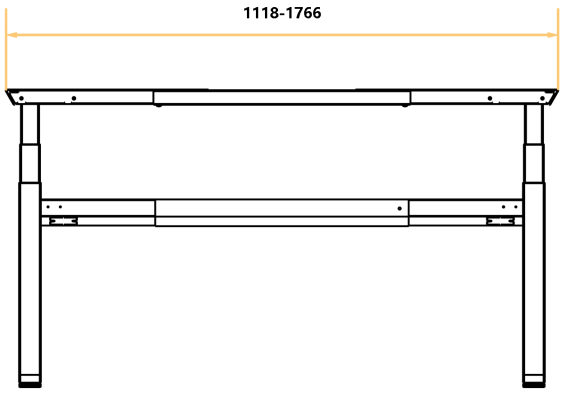

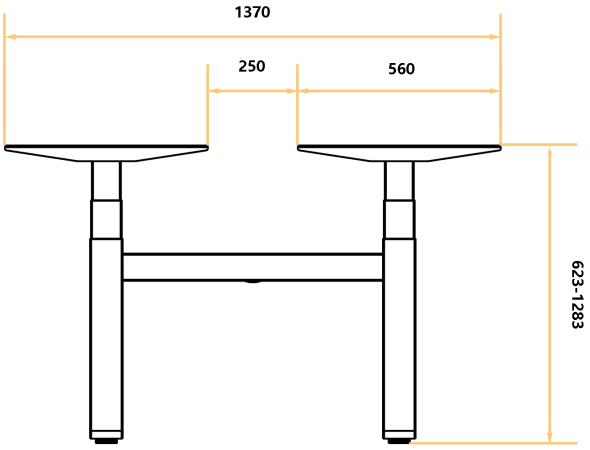

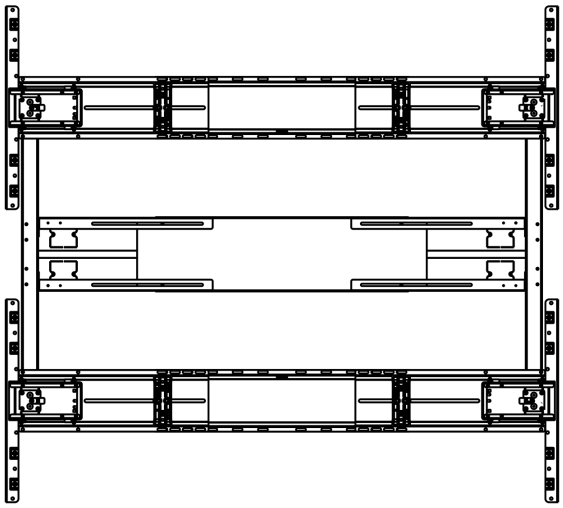

TECHNICAL DATA

Frame size	1118 mm - 1766 mm
Travel range (without tabletop)	623 mm (± 5mm) - 1283 mm (± 5mm)
Stroke	660 mm
Adjustment speed max	up to 60 mm/sec (with reduced load)
Lifting capacity (without tabletop)	up to 120 kg equally loaded on each side of the bench
Input rating	230 V / 50 - 60 Hz / 4A (2 x 2 A)

LOGICDATA
MOTION FOR YOUR LIFE

Duty cycle	1 min. ON / 9 min. OFF
Weight (frame only)	± 7.4 kg for each side of the bench
Weight (complete system)	48,7 kg
Available colors	Black (non-)structured / White (non-)structured / Silver (non-)structured
Ambient conditions during transport and storage	Temperature between -35°C and 80°C Temperature over 50°C only for periods not exceeding 72h Maximum relative humidity between 95% and 5% (lower allowed)
Ambient conditions during operations	Temperature between 5°C and 40°C Maximum relative humidity between 95% and 68% (lower allowed)
Applied standards	DGUV Grundsatz 315-410/09.2021 | DIN EN 527-2/07.2019 DIN EN 527-1/08.2011 | EK5/AK3 13-01:2018
Order code	Example OPTIMUS-S4-RE1-3S-DCR-EU-W01-LDS-00-01 OPTIMUS-A0-BB0-CD-EEE-FF-G00-HHH-00-01

