www.jiecang.com

JIECANG

JC35TM2
Base Cabinet Lifting System



TECHNOLOGY
DRIVES INTELLIGENT LIFE

JIECANG

Data Sheet

JC35TM2-420/480

JC35TM2-420/JC35TM2-480 is a lifting system designed for island lifting scenarios, mainly applied in kitchen and wardrobe island systems. It features a low installation distance, easy installation, freely adjustable height, and stable lifting performance.





Hand controller
JCHT35M18C




Remote controller
JCHR35R1

Technical Specifications

Input voltage: 220VAC	Rated power: 58W
Maximum thrust force: 100KG (including cabinet)	Specification 1 stroke/installation distance: 420/310±3mm
Load noise: Below 52dB	Specification 2 stroke/installation distance: 480/360±3mm
No-load speed: 13mm/s	Load speed: 10mm/s
Operating temperature: -10℃ to +50℃	Relative humidity: Below 95% (no condensation)
Control method: Wireless touch remote control or handheld controller	Self-locking function: Yes
Overload protection: Yes	Protection class: IP20
Descending collision prevention: Yes	Packaging dimensions: 350*350*550mm
Product gross weight: 8 kg	Product net weight: 7 kg
Motor wiring method: Bottom side	Operating conditions: 10% full-load duty cycle; under full-load conditions, continuous operation for a maximum of 2 minutes within 20 minutes.
Upper and lower installation plate dimensions: 295 × 200 mm	

Dimension

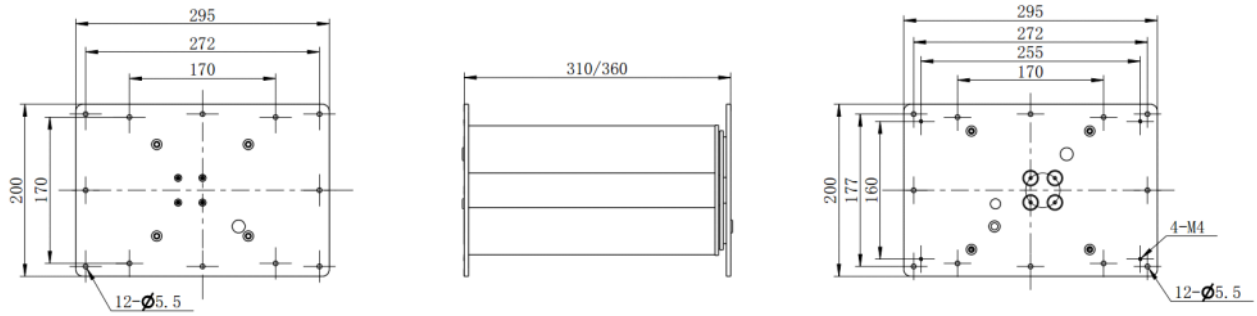

Ordering example

JC35TM2-0-0-1-10-24-420/310-0-2-21-0D5-10-B

- Color
- Surface
- Cable length
- The type of the plug and cable
- Connection position
- Mounting
- Stroke length/Installation dimensions
- Input voltage
- Speed at full load
- Load in push
- Profile code
- Optional features
- Model

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG' s product are constantly improving, it is possible to make changes to JIECANG' s product without prior notice.Therefore,JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product. Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.